



◆ System Configuration

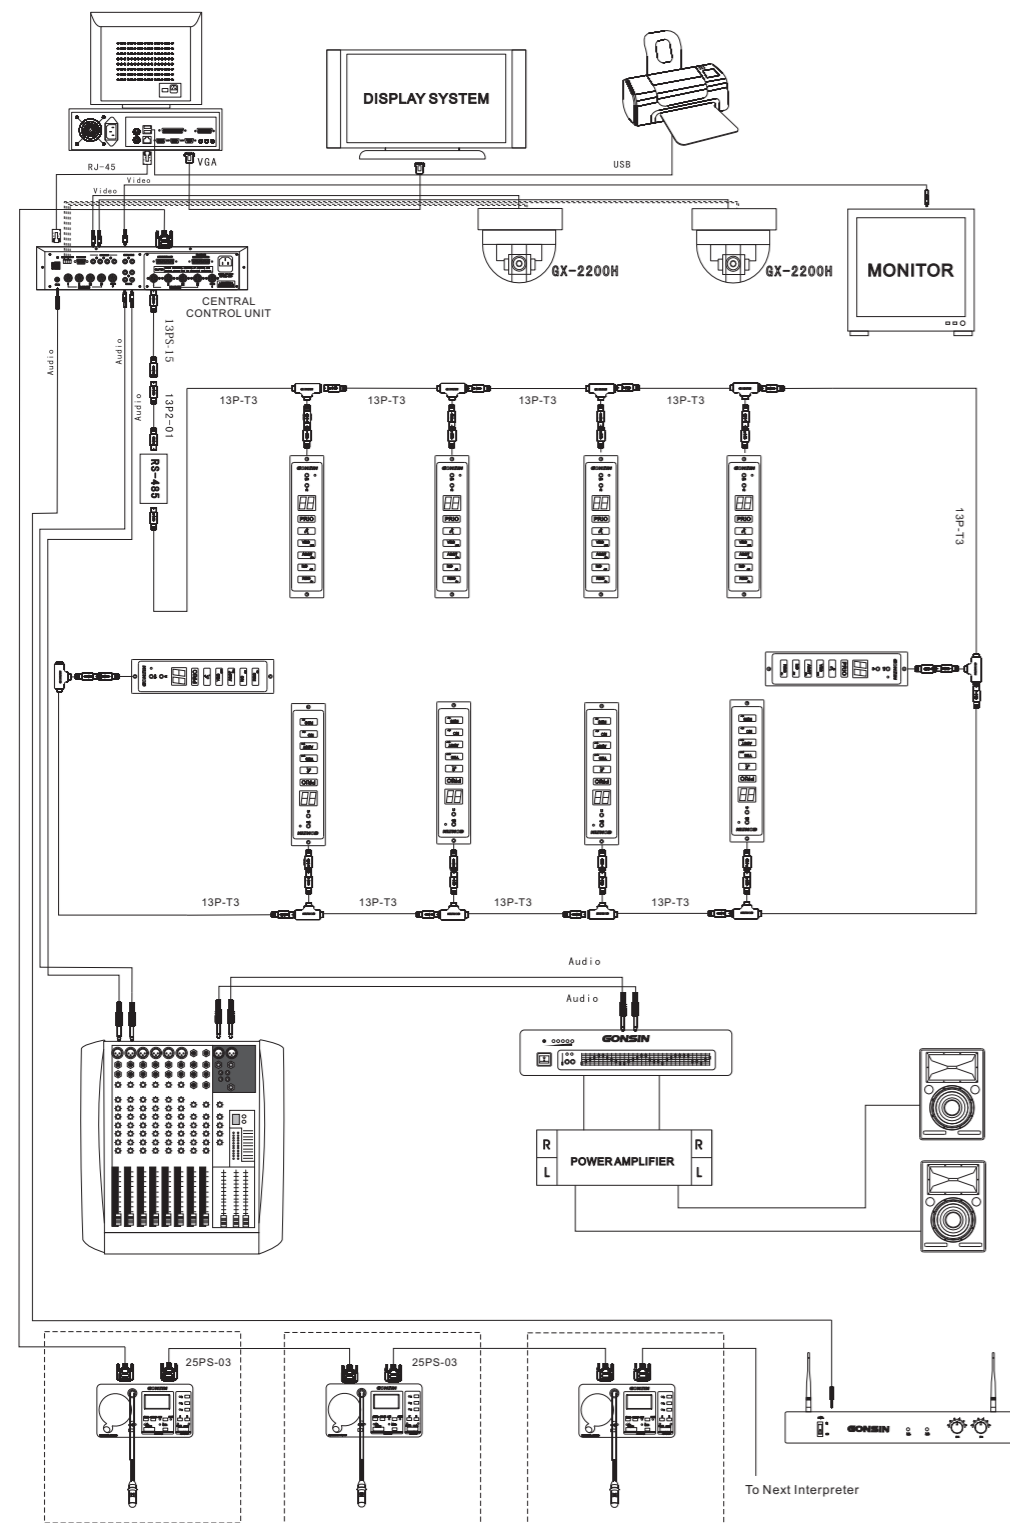

All rights reserved. The information and specifications included are subject to change without prior notice.

GONSIN CONFERENCE EQUIPMENT CO.,LTD.
www.gonsin.com

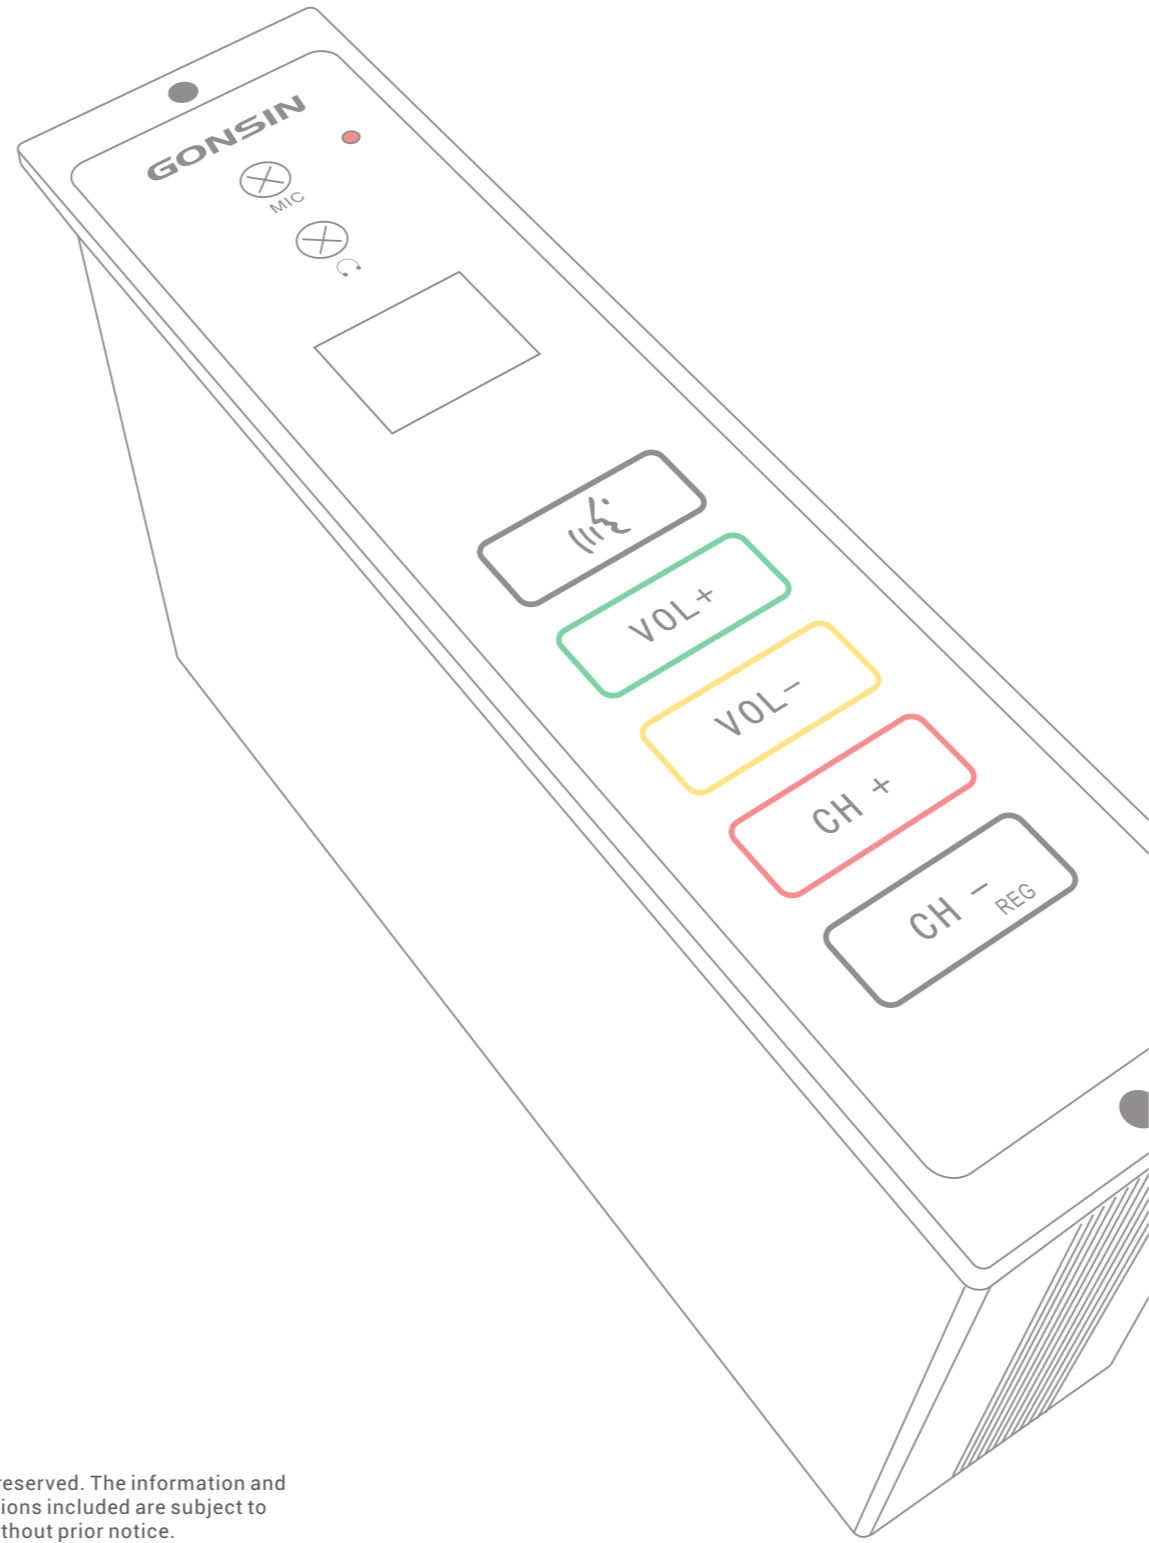

GONSIN®



TL-5500

Digital Conference System



GONSIN TL-5500 digital conference system, designed for seat arm flush mounting, offers an all-in-one conferencing solution featuring microphone discussion, interactive voting, simultaneous interpretation, attendance registration, video tracking, audiovisual recording and software control.

Chairman Unit / Delegate Unit

The conference unit allows the delegate to speak, request to speak, register attendance and cast a vote. Each unit comes with headphone jack and volume control for the delegate to listen to the floor audio and any interpreted language channel, and adjust volume level for comfortable listening. 1 to 4 delegate microphones can be active at the same time. Multiple chairman and vice-chairman units can be used in one system, and can be active at any time regardless of preset delegate mic limit. Chairman unit has the additional priority button to override all delegate units to control the conference.



Basic Functions

- ◆ Microphone discussion: push to talk or request to talk. AUTO/FIFO/OPERATOR modes are available for microphone management
- ◆ Language interpretation: 1+5 channels. Up/down buttons as channel selectors. Channel number is shown on LED. Headphone listening with volume control
- ◆ Attendance registration: by REG key press
- ◆ Voting: YES/ABST/NO. Vote counting and result display are enabled automatically by PC
 - Single-choice and multiple-choice voting
 - First keypress and final keypress voting
- ◆ Election: elect one or more out of N candidates, with 'competitive election', 'equal number election' and 'quick election'
- ◆ Supports automatic video tracking, with preset panoramic position

Technical Specifications

Mounting type	chair armrest mounting
Language interpretation	1+5 channels
Mic pick-up range	up to 20 cm
Frequency response	50Hz-18kHz
Sensitivity	-46dB±4dB
Power input	24V DC
Microphone stem length	165 mm
Microphone length	120 cm (including cord)
Headphone and microphoe jack	mini 3.5mm
Panel dimensions	210×50×2 mm (H×W×D)
Weight	0.55 kg

Main Features

- ◆ Compact design for seat arm flush mounting
- ◆ Highly resistant to mobile phone interference
- ◆ Channel selectors for interpretation listening
- ◆ Pluggable omnidirectional handheld microphone
- ◆ 5 buttons for voting and election



TL-VXQC5500



TL-VDQC5500



TL-VXQCB5500



TL-VDQCB5500



Conference Terminal Feature Chart

Model Number	Product Description	Handheld Microphone	Voting Facilities	Channel Selector	Phone Jack	Volume Control
TL-VXQC5500	Chairman Unit	✓		✓	✓	✓
TL-VDQC5500	Delegate Unit	✓		✓	✓	✓
TL-VXQCB5500	Chairman Unit	✓	✓	✓	✓	✓
TL-VDQCB5500	Delegate Unit	✓	✓	✓	✓	✓

System Components

Model Number	TL-VQC5500	TL-VQCB5500
Central Control Unit	TC-Z3	TC-ZB3
Extension Unit	ZJ- KR	ZJ- KR
Chairman Unit	TL-VXQC5500	TL-VXQCB5500
Delegate Unit	TL-VDQC5500	TL-VDQCB5500
Interpreter Console	TC-F06	TC-F06
Interpreter Headset	TC-D2	TC-D2
Single Earphone	TC-D1/TC-D3	TC-D1/TC-D3
Management Software	V5.0 (optional)	V5.0 (required)
T-type connection cable	13P-T3	13P-T3
Extension cable	13PS	13PS